

Smartwin in Ziegelwand Coriso

| | |
|---|--|
| Fenster U-factor Therm (Fenster) $U_1 = 0,765$ W/m ² K $l_{1i} = 0,400$ m | U-Wert (Wand) $U_2 = 0,139$ W/m ² K $l_{2i} = 1,210$ m |
|---|--|

Therm

| | |
|---------------------------------------|---------------------------|
| U-factor Therm (Fenster mit Wand) = | 0,2966 W/m ² K |
| Thermlänge = | 1,610 m |
| 2 dimensionaler Wärmestrom $L^{2D} =$ | 0,478 W/mK |

Ψ-Wert

| | |
|-------------------|------------|
| $\Psi_{Einbau} =$ | 0,003 W/mK |
|-------------------|------------|

f_{Rsi}-value



| | |
|-----------------------------------|--------------------------|
| Innentemperatur = | 20,0 °C |
| Außentemperatur = | -10,0 °C |
| niederste Oberflächentemperatur = | 12,1 °C |
| Temperaturfaktor $f^{2D} =$ | 0,737 $f_{Rsi} \geq 0,7$ |

... mit $R_{si} = 0,25$ m²K/W / ... mit $R_{se} = 0,04$ m²K/W

Oberaudorf den 11.04.2013

F. Eberle

Isothermen

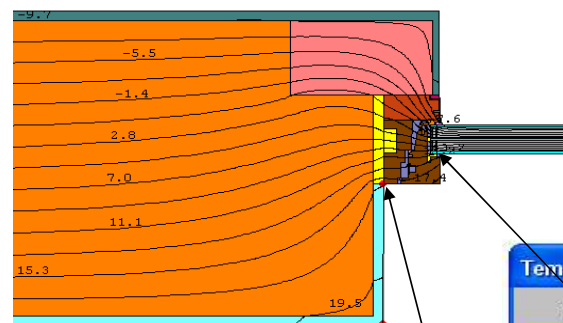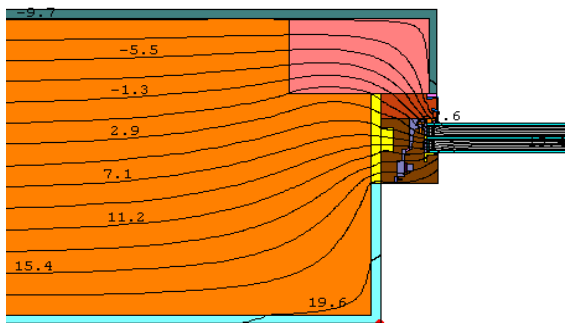

Swisspacer V

